

BDA Series

● 105°C 2,000Hrs assured

- Vertical SMD type
- Long life of MVK Series.
- EBDA Series : Ecological capacitors with the same characteristics as BDA

Solvent-proof



MVK


BDA

Long life

SPECIFICATIONS

Item	Characteristics						
Rated Voltage Range	4 ~ 35V _{DC}						
Operating Temperature Range	-40 ~ + 105°C						
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)						
Leakage Current	I = 0.01CV(μA) or 3μA, whichever is greater Where, I : Leakage current(μA), C : Nominal capacitance(μF), V: Rated voltage(V _{DC}) (at 20°C, 2 minutes)						
Dissipation Factor Tanδ(Max.)	Rated Voltage(V _{DC})	4	6.3	10	16	25	35
	Tanδ(Max.)	0.37	0.28	0.24	0.20	0.16	0.12
(at 20°C, 120Hz)							
Temperature Characteristics (Max. Impedance ratio)	Rated Voltage(V _{DC})	4	6.3	10	16	25	35
	Z(-25°C)/Z(20°C)	6	3	3	2	2	2
	Z(-40°C)/Z(20°C)	12	8	5	4	3	3
(at 120Hz)							
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours. 105°C.						
	Rated Voltage(V _{DC})	4 ~ 16 V _{DC}			25 ~ 35 V _{DC}		
	Capacitance change	≤ ±25% of the initial value			≤ ±20% of the initial value		
	Tanδ	≤ 200% of the initial specified value					
Leakage current	≤ The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them 1,000hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a Minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.						
	Rated Voltage(V _{DC})	4 ~ 16 V _{DC}			25 ~ 35 V _{DC}		
	Capacitance change	≤ ±25% of the initial value			≤ ±20% of the initial value		
	Tanδ	≤ 200% of the initial specified value					
Leakage current	≤ The initial specified value						
Others	Satisfied characteristics W of KS C 6421						

PART NUMBERING SYSTEM

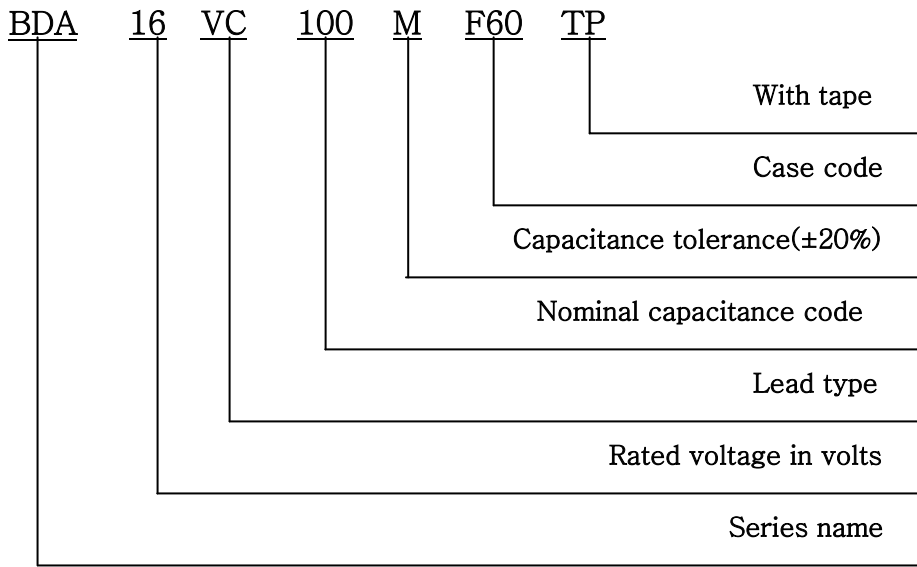



Capacitance	Code
0.1 μF	R1
0.47 μF	R47
1.0 μF	1
4.7 μF	4R7
10 μF	10
100 μF	100

Case Code	$\varnothing D \times L_{\text{max}}$ (mm)
D55	$\varnothing 4 \times 5.5L$
E55	$\varnothing 5 \times 5.5L$
F55	$\varnothing 6.3 \times 5.5L$
F60	$\varnothing 6.3 \times 6.0L$


DIMENSIONS OF BDA Series (Type :VC)

DIMENSIONS

Marking

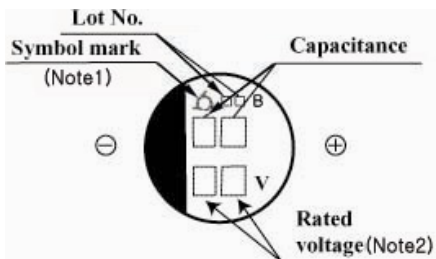


 **Sold land on PC board**



Note 1 : 4 x 5.2(D55), 5 x 5.2(E55) is excluded symbol mark

Note 2 : 6.3WV is marked by 6V.

Note 3 : Case Color ; Clarity Green



Case code	$\varnothing D$	L	A	B	C	W	P	a	b	c
D55	4	5.2	4.3	4.3	5.1	0.5-0.8	1.0	1.0	2.6	1.6
E55	5	5.2	5.3	5.3	5.9	0.5-0.8	1.4	1.4	3.0	1.6
F55	6.3	5.2	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6
F60	6.3	5.7	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6

RATINGS OF BDA Series

Permissible Ripple Current(mArms / 105°C, 120Hz)

Item μF	V _{DC}	4(0G)		6.3(0J)		10(1A)		16(1C)		25(1E)		35(1V)	
	Case Code	Ripple Current	Case code	Ripple Current	Case code	Ripple Current	Case code	Ripple current	Case code	Ripple current	Ripple current	Case code	
0.1													
0.22													
0.33													
0.47													
1													
2.2													
3.3													
4.7										D55	13	D55	15
10								D55	16	E55	25	E55	25
22	D55	19	D55	21	E55	30	E55	30	F55	40	F55	40	
33	E55	30	E55	34	E55	34	F55	45	F55	45			
47	E55	34	E55	36	F55	48	F55	48	F60	52			
100	E55	45	F60	56	F60	90	F60	110					

▲ Permissible Ripple Current(mArms/105°C, 120Hz)

▲ Case Code